




Weld Neck Flanges

Weld Neck Flanges are a very common type of pipe flanges used in various industrial applications. They have become a protracted tapered center and are also mostly applied for high pressure applications.

We are a quickly developing association, occupied with manufacturing, supply and fare of **weld neck flanges, industrial weld neck flanges and forged flanges**. Our weld neck the flanges are penetrated with the wall thickness of the flange bearing the same measurements of pipe. Flanges intended for more substantial pipes have got smaller sized weary, although flanges involving lighter pipe have got bigger weary. These kinds of **weld neck flanges, commercial weld neck flanges, forged flanges** are used for high-pressure, cold or hot temperature.

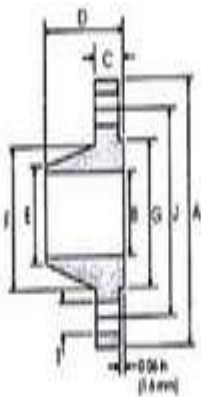

Product Range:

WNRF Flanges Size : 1/8" NB TO 48"NB.

WNRF Flanges Class : 150#, 300#,400 #,600#,900#, 1500# & 2500 #.

Stainless Steel WNRF Flanges: ASTM A 182, A 240

Grade : F 304, 304L, 304H, 316, 316L, 316Ti, 310, 310S, 321, 321H, 317, 347, 347H,904L, Duplex stainless steel UNS S31803, 2205, Super Duplex stainless steel UNS S32750

| | | |
|----------------|---|--|
| Address | : | Rexino Stainless & Alloys, Shop No. 6, Ghojaria Estate no. 2 Kharwa Lane, 6th Kumbharwada Kumbharwada Mumbai- 400004 |
| E-mail | : | info@rexinostainless.com , export@rexinostainless.com |
| Visit Us | : | www.rexinostainless.com |
| Contact Person | : | Mr. Bhavesh Chandan |
| Mobile | : | +91- 9920773453 |



Carbon Steel WNRF Flanges: ASTM A 105, ASTM A 181

Alloy Steel WNRF Flanges : ASTM A 182, GR F1, F11, F22, F5, F9, F91

Nickel Alloys WNRF Flanges : Monel 400 & 500, Inconel 600 & 625, Incolloy 800, 825, Hastelloy C22,C276

Copper Alloys WNRF Flanges: Copper, Brass & Gunmetal

WNRF Flanges Standard

ANSI : ANSI B16.5, ANSI B16.47, MSS SP44, ANSI B16.36, ANSI B16.48

DIN : DIN2527, DIN2566, DIN2573, DIN2576, DIN2641, DIN2642, DIN2655, DIN2656, DIN2627, DIN2628, DIN2629, DIN 2631, DIN2632, DIN2633, DIN2634, DIN2635, DIN2636, DIN2637, DIN2638, DIN2673

B.S : BS4504 , BS4504, BS1560, BS10

Value Added Services

- Hot Dip Galvanizing ,
- Epoxy Coating.

| | | |
|-----------------------|---|---|
| Address | : | Rexino Stainless & Alloys, Shop No. 6, Ghojaria Estate no. 2 Kharwa Lane, 6th Kumbharwada Kumbharwada Mumbai- 400004 |
| E-mail | : | info@rexinostainless.com , export@rexinostainless.com |
| Visit Us | : | www.rexinostainless.com |
| Contact Person | : | Mr. Bhavesh Chandan |
| Mobile | : | +91- 9920773453 |



REXINO

STAINLESS & ALLOYS

Technical Specification

150 LB. FLANGES

| Normal pipe size | Outside dia. of flange | Minimum thickness of flange | Overall Length | | | Bolt Circle | No. and Size of Holes | | O.D. of raised face |
|------------------|------------------------|-----------------------------|----------------|--------------------------|-----------|-------------|-----------------------|------|---------------------|
| | | | Welding neck | Slip-on & socket welding | Lap Joint | | No. | dia. | |
| | O | Q | Y | | | Diam. | | | R |
| 1/2 | 89 | 11.2 | 47.6 | 15.7 | 15.7 | 60.5 | 4 | 15.7 | 35.1 |
| 3/4 | 99 | 12.7 | 57.2 | 15.7 | 15.7 | 69.9 | 4 | 15.7 | 42.9 |
| 1 | 108 | 14.3 | 55.6 | 17.5 | 17.5 | 79.2 | 4 | 15.7 | 50.8 |
| 1.1/4 | 117 | 15.7 | 57.2 | 20.6 | 20.6 | 89.9 | 4 | 15.7 | 63.5 |
| 1.1/2 | 127 | 17.5 | 61.9 | 22.4 | 22.2 | 98.6 | 4 | 15.7 | 73.2 |
| 2 | 152 | 19.1 | 63.5 | 25.4 | 25.4 | 120.7 | 4 | 19.1 | 91.9 |
| 2.1/2 | 178 | 22.4 | 69.9 | 28.4 | 28.4 | 139.7 | 4 | 19.1 | 104.6 |
| 3 | 191 | 23.9 | 69.9 | 30.2 | 30.2 | 152.4 | 4 | 19.1 | 127 |
| 3.1/2 | 216 | 23.9 | 71.4 | 31.8 | 31.8 | 177.8 | 8 | 19.1 | 139.7 |
| 4 | 229 | 23.9 | 76.2 | 33.3 | 33.3 | 190.5 | 8 | 19.1 | 157.2 |
| 5 | 254 | 23.9 | 88.9 | 36.6 | 36.6 | 215.9 | 8 | 22.4 | 185.7 |
| 6 | 279 | 25.4 | 88.9 | 39.6 | 39.6 | 241.3 | 8 | 22.4 | 215.9 |
| 8 | 343 | 28.4 | 101.6 | 44.5 | 44.5 | 298.5 | 8 | 22.4 | 269.7 |
| 10 | 406 | 30.2 | 101.6 | 49.3 | 49.3 | 362.0 | 12 | 25.4 | 323.9 |
| 12 | 483 | 31.8 | 114.3 | 55.6 | 55.6 | 431.8 | 12 | 25.4 | 381 |
| 14 | 533 | 35.1 | 127.0 | 57.2 | 79.2 | 476.3 | 12 | 28.4 | 412.8 |
| 16 | 597 | 36.6 | 127.0 | 63.5 | 87.4 | 539.8 | 16 | 28.4 | 469.9 |
| 18 | 635 | 39.6 | 139.7 | 68.3 | 93.8 | 577.9 | 16 | 31.8 | 533.4 |
| 20 | 699 | 42.9 | 144.5 | 73.2 | 103.1 | 635.0 | 20 | 31.8 | 584.2 |
| 24 | 813 | 47.8 | 152.4 | 82.6 | 111.3 | 749.3 | 20 | 35.1 | 692.2 |

Address : Rexino Stainless & Alloys,
 Shop No. 6, Ghojaria Estate no. 2
 Kharwa Lane, 6th Kumbharwada
 Kumbharwada
 Mumbai- 400004
E-mail : info@rexinostainless.com ,
export@rexinostainless.com
Visit Us : www.rexinostainless.com
Contact Person : **Mr. Bhavesh Chandan**
Mobile : **+91- 9920773453**